



PD97ES

ELECTRIFIED MORTISE LOCK WITH AUTO-LOCKING & MONITORING FOR SLIDING DOORS

Designed to easily integrate with all standard access control systems and monitoring terminals. Can be paired with glass or wood sliding doors.



CODE COMPLIANCE


- UL1034 Burglary-Resistant Electric Locking Mechanisms
- UL294 Standard for Access Control System Units
- ANSI/BHMA A156.25 Electrified Mortise Locks
- ANSI/BHMA A156.18 Finishes
- ANSI A117.1 ADA Accessibility

ELECTRICAL SPECS

Lock Body	≤560 mA
Strike	≤40 mA
Keypad	≤90 mA
Handwave	≤30 mA
Relay	≤30 mA
Monitor	≤30 mA

Maximum current for individual parts when in operation at 12/24V.

FINISHES



FEATURES

- Stepper motor-driven 12/24V electrified lock for sliding doors
- Built-in Door Position Switch (DPS) and Deadbolt Monitoring Switch (DBM) sensors, enabling auto-latching and auto-locking functions
- Supports touchless opening solutions when paired with an auto-operator
- Fail secure lock remains mechanically locked during power failure, ensuring security
- Compliant with UL Standards for UL294 (Safety Access Control System Units) Testing


SPECIFICATIONS

Door Thickness	1-3/4" (45mm) Standard
	1-3/8" (35mm) Thin Door Kit
	2" to 2-1/4" (50mm to 57mm); Thick Door Kit available
Backset	2-3/4" (70mm)
	2-1/2" (63.5mm)
Spindle Hub Size	Lever: 8mm x 8mm square
	Thumbturn: 5mm x 5mm square
Center-to-Center Distance	Lever to Cylinder: 3-7/8" (98mm)
	Lever to Thumbturn: 2-11/16" (68mm)
Cylinder	Schlage C keyway 6 pin
	1-1/4" mortise cylinder w/ 2 keys (standard)
	Optional SFIC and LFIC housing and cores available
CAM	CAM01-SCL Clover Cam
Material	Trim: Stainless Steel Lockcase: Heavy gauge Steel
	Bolt: Brass and Stainless Steel Cylinder: Solid Brass
	Faceplate/Strike: Stainless Steel

FUNCTIONS


PD97ES Functions are **Fail Secure**. Deadbolt auto-locks once door is closed; during power failure, deadbolt remains mechanically locked from outside. PD97ATL includes the following monitoring sensors:

- REX = Request-to-Exit Monitoring Switch
- DBM = Deadbolt Monitoring Switch
- DPS = Door Position Switch




ENTRANCE 53

- Deadbolt projected/retracted by built-in stepper motor when energized by 12/24V DC power transferred through contacts on lock and strike
- Thumbturn inside throws/retracts deadbolt to lock/unlock door
- Outside lever is rigid at all times
- Inside lever always unlocks deadbolt for emergency egress



STOREROOM 80

- Latchbolt projected/retracted by built-in stepper motor when energized by 12/24V DC power transferred through contacts on lock and strike
- Key from outside to throw/retract latchbolt to lock/unlock door
- Door cannot be locked from inside
- Outside lever is rigid at all times
- Inside lever always unlocks latchbolt for emergency egress



PATIO / EXIT 60

- Deadbolt projected/retracted by built-in stepper motor when energized by 12/24V DC power transferred through contacts on lock and strike
- Thumbturn inside throws/retracts deadbolt to lock/unlock door
- Outside lever is rigid at all times
- Inside lever always unlocks deadbolt for emergency egress

FUNCTION TABLES


MAIN FEATURES

	Entrance	Storeroom	Patio/Exit
Outside Lever	✓	✓	✓
Inside Lever	✓	✓	✓
Lockcase	✓	✓	✓
Cylinder	✓	✓	✗
Thumbturn	✓	✗	✓

OPTIONAL ACCESSORIES

	Entrance	Storeroom	Patio/Exit
Switch	✓	✓	✓
Power Supply	✓	✓	✓
Keypad (Relay)	✓	✓	✓
Push Button	✓	✓	✓
Handwave	✓	✓	✓


COMPONENTS

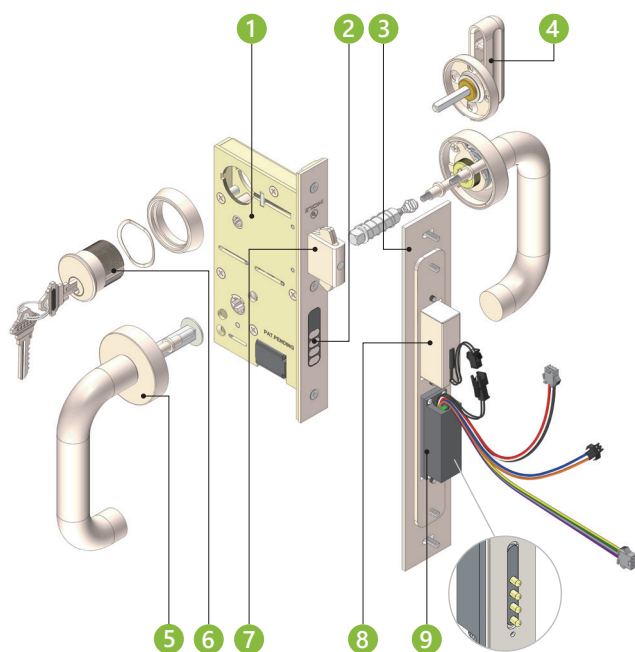

- 1 PD97ES lockcase and faceplate
PD97ES-234 2-3/4" backset or
PD97ES-212 2-1/2" backset
- 2 Faceplate contacts; Auto-locking, Door Positioning Switches (DPS), and Power Transfer
- 3 3D Adjustable Strike with reinforcement plate for door frame
 - Up and down adjustment is $\pm 1/4"$
 - Left and right adjustment is $\pm 1/8"$
 - Front and back adjustment is by adding $\pm 3/64"$ spacers
- 4 ADA Compliant thumbturn
- 5 Heavy-duty Stainless Steel cast rose with choice of X-Series lever design
- 6 Schlage C keyway, 6 pin 1-1/4" mortise cylinder
- 7 1" (25.4mm) heavy-duty brass bolt throw with self-retracting non-marring hooks
- 8 Dust box with Deadbolt Monitoring Sensor (DBM)
- 9 Power Transfer Strike with spring-loaded prongs

NOTE: PD97ES locks only require 3-6 seconds of continuous power to engage or retract deadbolt; time varies subject to soft close or weatherstripping conditions on sliding door. Continuous power longer than required will damage the motor, so make certain that your connected relay has a timed function.


OPTIONAL INOX ACCESS CONTROL ACCESSORIES

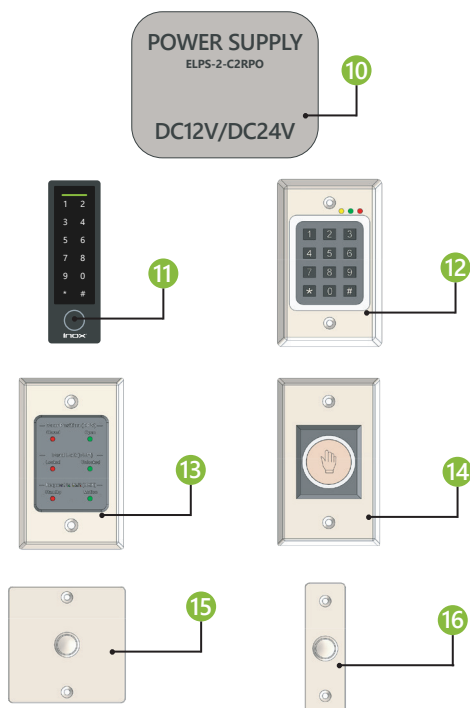

*Order as a separate line item.




- 10 **INX-ELPS-2-C2RPO** Power Supply with built-in surge protection, Voltage: 1.75A @ 12/24V DC, 1.75A @ 115VAC
- 11 **ISK-B300** Multi-Credential Reader / Controller
Dimensions: 5-7/8" x 1-3/4" x 7/8"
- 12 **AC-KP1200** Stainless Steel keypad faceplate for indoor electrically locked door application
Voltage: 12/24V DC Dimensions: 4-1/2" x 2-3/4" x 1-1/4"
- 13 **AC-MP100** Stainless Steel Monitoring Panel
Dimensions: 4-1/2" x 2-3/4" x 3/4"
- 14 **AC-IR1100** Handwave sensor with illuminated display
Voltage: 2A @ 12/24V DC Dimensions: 4-1/2" x 2-3/4" x 1"
- 15 **AC-PB200** Wide Push Button with illuminated display
Dimensions: 3-3/8" x 3-3/8" x 3/4"
- 16 **AC-PB100** Narrow Push Button with no illuminated display
Dimensions: 3-1/2" x 1-1/8" x 1"

DIMENSIONS

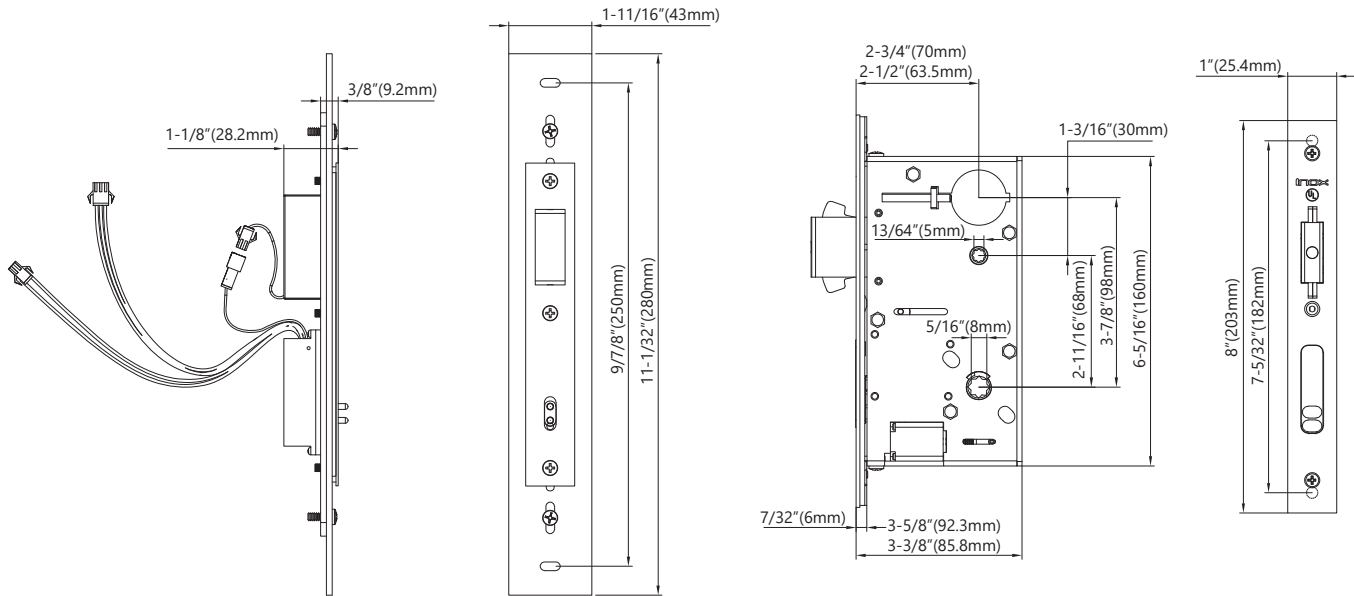

*Available finishes in Stainless Steel (32D), Graphite Black (19G), CeraMax Graphite Black (C19G), CeraMax Flat Black (C19), CeraMax Stormy Grey (CGY), CeraMax Dark Bronze (CDB), CeraMax Burnt Bronze (CBB). Please see Finish Solutions on INOX website for special order finishes.

BUILT-IN MONITORING SWITCHES

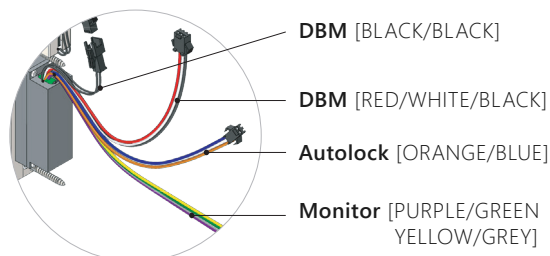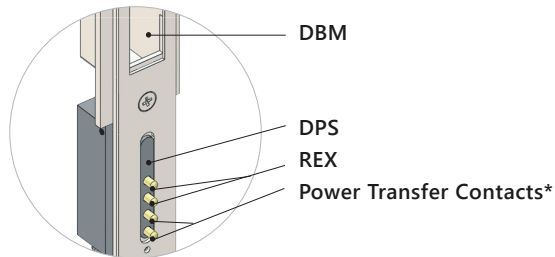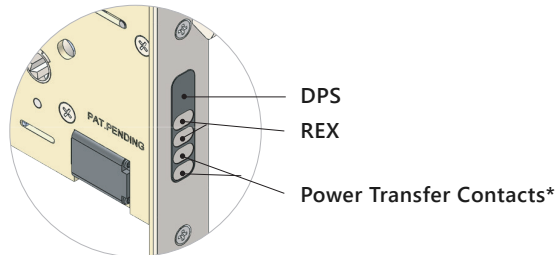

*Power transfer to the lock occurs on contact with the pogo pins on the strike.

AUTO-LOCKING FUNCTION [ORANGE/BLUE]

- When the door is closed, the DPS will send power to the motor for auto-locking.
- When the DBM detects the deadbolt is not fully engaged, the DPS indicates the door is still closed; the auto-locking switch will trigger the power to be sent to the lock for auto-relocking again. If this verification process is repeated 3 times, an alarm sound will be activated unless user re-opens the door.

DPS (DOOR POSITION SWITCH) [YELLOW/PURPLE]

- Monitoring signal showing the position of the door either as closed or open.
- When door is closed, the DPS signal will trigger an auto-locking switch function.

DBM (DEADBOLT MONITORING SWITCH) [GREEN/PURPLE]


- Monitoring signal showing the position of the deadbolt as locked or unlocked.
- If the deadbolt is not fully engaged in the strike after a locking cycle, the DBM signal will trigger a relocking cycle.
- After 3 failed attempts to lock, an integrated speaker will chime 60 seconds to notify user that the door failed to lock.

REX / INSIDE LEVER MONITORING SWITCH [GREY/PURPLE]

- Monitoring signal alerts that someone is using the lever, intending to exit from within secure area. someone intending to exit from within the secure area.
- Send a signal to the relay requesting power transfer to re-lock deadbolt.

PD97ES ELECTRIFIED SLIDING DOOR MORTISE LOCK WITH MONITORING

WIRING DIAGRAM: ENTRANCE 53 FUNCTION

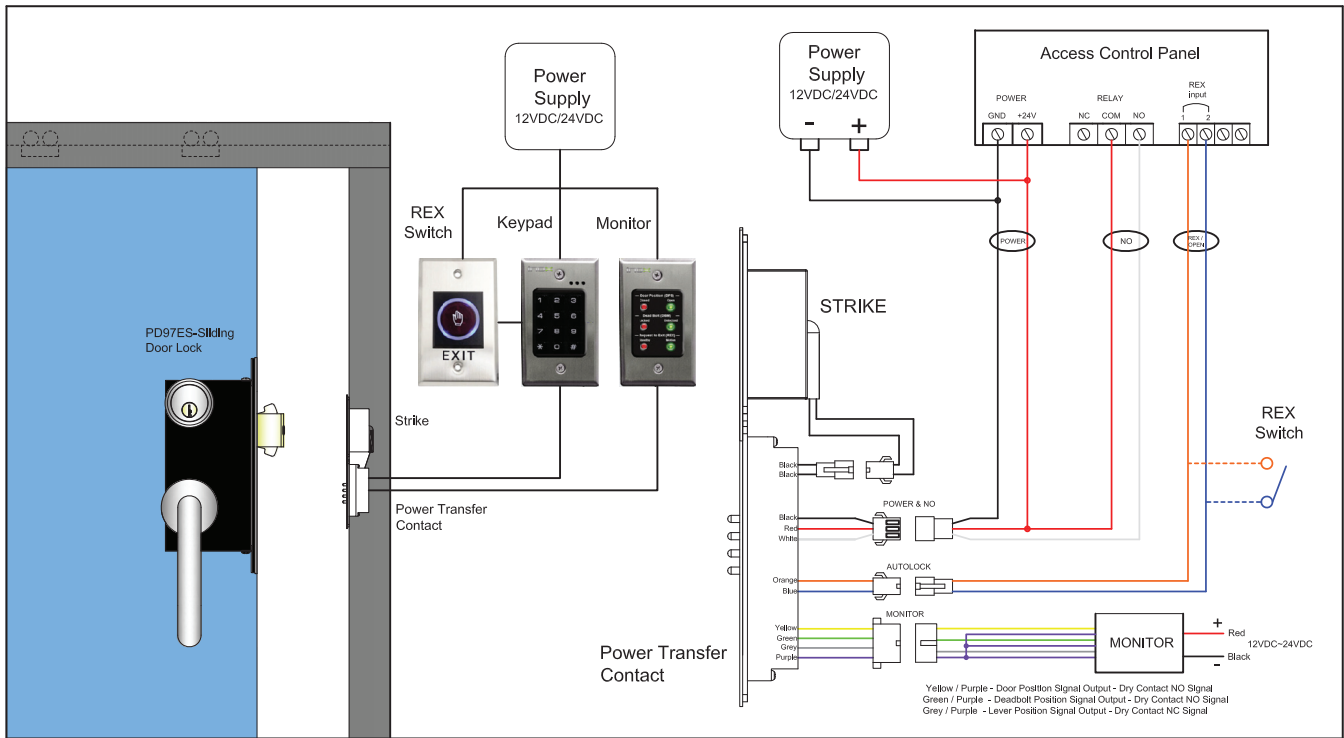

For UL compliance, this product shall be used with UL Listed access control and buglar alarm control panels / peripheral devices. Accessories are shown for reference only and not evaluated for UL294 or UL1034.

PD97ES Electrified Locks are designed to operate at 12/24V. Complete INOX system maximum current draw is 780 mA. INOX breakdown of individual items:


- Lock Body ≤ 560 mA
- Strike ≤ 40 mA
- Keypad ≤ 90 mA
- Handwave ≤ 30 mA
- Relay ≤ 30 mA
- Monitor ≤ 30 mA

For UL compliance the product is to be powered via a UL294 or UL603 or UL2610 power supply with a class 2 power limited output suitable for the power requirement of the product.

Door Position Switch (DPS) and the Deadbolt Monitoring Switch (DBM) with operation resistive load of 250K cycles.

HANDING

- Handing refers to the direction the door slides open. Example: If the door slides to the left to open, it is a left-handed door.
- Determine door direction from the exterior or key side of the door when facing into the room.

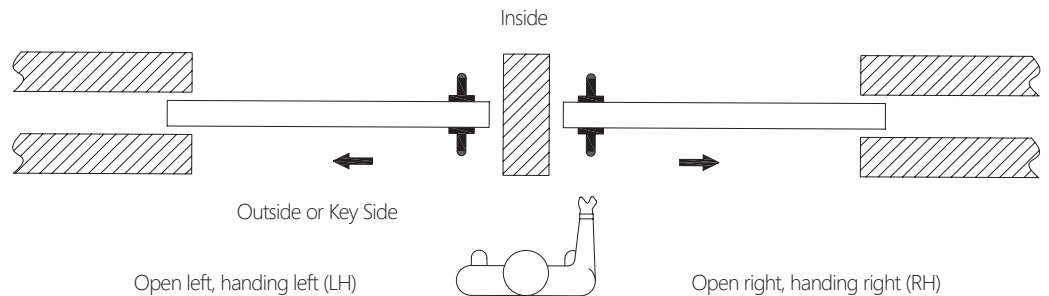

ROSE & LEVER DESIGNS



XRA ROSE
*XGT available upon request.

**Return-to-Door Lever Designs comply with California and other state building codes for door openings.*



101 COLOGNE



102 MUNICH*



105 FRANKFURT



221 AURORA



243 SUNRISE



244 TWILIGHT*



276 PLAZA



318 CAFÉ



319 HAMPTON



320 EMPIRE



321 VALENCIA*



345 TOKYO



346 OSAKA*



109 STUTTGART*

THUMBTURN OPTIONS

46MM DIAMETER



1



2



3

53MM DIAMETER



1



2



3

REF	DESCRIPTION	PART NUMBER
1	TT02 Thumbturn in Round Rosette	GR02
2	TT04 Thumbturn in Round Rosette	GR04
3	ADA TT07 Thumbturn in Round Rosette	GR07

REF	DESCRIPTION	PART NUMBER
1	TT02 Thumbturn in Round Rosette	GT02
2	TT04 Thumbturn in Round Rosette	GT04
3	ADA TT07 Thumbturn in Round Rosette	GT07

ELECTRIFIED LOCKS COMPARISON

LOCK SERIES	PD97	PD97PT	PD97ATL	PD97ATLC1	PD97ES
Interior Emergency Egress	✓	✓	✓	✓	✓
Easy Zero-Door-Channel Installation	✗	✓	✓	✓	✓
Anti-Binding Winged Hook Bolt	✓	✓	✓	✓	✓
Auto-Latching, Auto-Locking	✓	✓	✓	✓	✓
Deadbolt Monitoring Switch (DBM)	✗	✗	✗	✓	✓
Lever Positioning Switch (REX)	✗	✗	✗	✗	✓
Door Positioning Switch (DPS)	✗	✗	✓	✓	✓
ANSI/BHMA A156.25 Electrified Locking Device	✓	✓	✓	✓	✓
UL1034 Burglary Resistant Electric Lock Mechanism	✓	✓	✓	✓	✓
UL1784 Air Leakage Test for Draft, Smoke Door Assembly	✗	✓	✓	✓	✓
UL294 Safety and Security for Access Control System	✗	✓	✓	✓	✓

*PD97 and PD97PT can be integrated with advance relay switch and door positioning magnet to achieve auto-latching or auto-locking function.



HOW TO ORDER MORTISE LOCKS FOR SLIDING DOORS

HOW TO ORDER STANDARD LOCKSETS

To order locksets with a non-standard specification, please describe the additional requirements in the same sequence as below.
Please see price book for parts or additional service upcharge.

ROSE	LEVER	LOCK	FUNCTION	BACKSET	CYLINDER	THUMBTURN	FINISH	HANDING
------	-------	------	----------	---------	----------	-----------	--------	---------

XRA	243	-PD97ES	60	A	-S6	-GR04	-32D	-LH
1	2	3	4	5	6	7	8	9



ROSE

XRA

**XGT available upon request.*

LEVER

201	202	205	221	243
244	276	318	319	320
321	345	346	509	

LOCK

-PD97ES

FUNCTION

53 Entrance

60 Patio/Exit

80 Storeroom

10 Passage

5 BACKSET

- Blank = 2-3/4"
- A = 2-1/2"

6 CYLINDER AND HOUSING (INCLUDES COLLAR)

- LC = Less Cylinder
- Blank = Standard Mortise 1-1/4" Cylinder
- S6 = Small Format Interchangeable Cylinder (SFIC) Housing 1-1/4", 6-Pin, Less Core, L Clover Cam
- S7 = Small Format Interchangeable Cylinder (SFIC) Housing 1-3/8", 7-Pin, Less Core, L Clover Cam
- L6 = Large Format Interchangeable Cylinder (LFIC) Housing 1-1/2", 6-Pin, Less Core, L Clover Cam
- Order IC Cores and Thick Door Kits (TDKs) separately. (See Price Book)

7 THUMBTURN

46MM DIAMETER



53MM DIAMETER



8 FINISHES* (STANDARD)

- 32D Satin Stainless Steel
- 19G Graphite Black
- CeraMax Graphite Black (C19G)
- CeraMax Flat Black (C19)
- CeraMax Stormy Grey (CGY)
- CeraMax Dark Bronze (CDB)
- CeraMax Burnt Bronze (CBB)

*Please see Finish Solutions on INOX website for special order finishes.

9 HANDING

- RH = Right Hand
- LH = Left Hand