



SF INDICATOR TRIM

Retrofit of Mortise SF Trim with Fan Indicator

- Outside and Inside Indicators in high contrast red and green with large text for color impaired vision
- Indication of lock status reduces contamination (fewer touches) on the outside and improves security (easy to verify that door is locked) on the inside

APPLICATION

Available for locks with several ANSI/BHMA functions, SF Indicator Trim is suited for a wide range of applications, including Hospitality, Commercial, Multi-Use facilities, and office openings requiring privacy indication


SPECIFICATION

Handing	Specify handing for all functions
Lever Spindle	8mm x 8mm square
Thumbturn Spindle	5mm x 5mm square
Center to Center	Lever to Cylinder: 3-7/8" (98mm) Lever to Thumbturn: 2-11/16" (68mm)
Plate Size	2-1/2" x 10-1/12" (63mm x 267mm)
Cylinder	Schlage C keyway 6 pin mortise cylinder with 2 keys standard. Optional keyways, keying services, and IC cores available

FINISH

- Satin Stainless Steel -32D, Bright Stainless Steel -32
- CeraMax Ceramic Coating - C19G Graphite Black, C19 Flat Black, CGY Stormy Grey, CDB Dark Bronze
- Please see Finish Solutions on INOX Website for special order finishes

DIMENSIONS

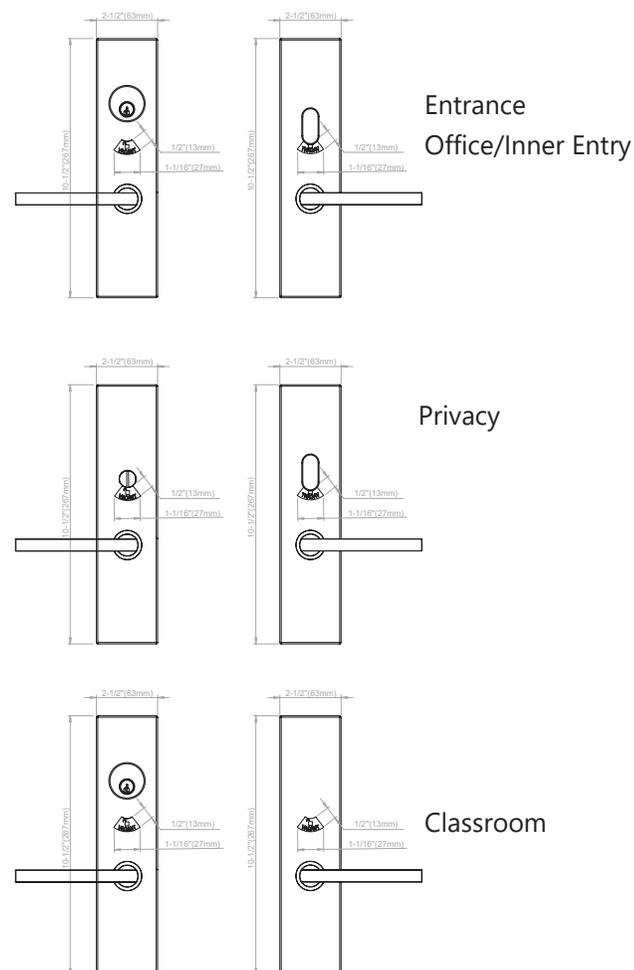

FUNCTION




Privacy with Coin Turn Indicator MC7096 (ANSI: F22)

- Latchbolt operated by lever from either side except when outside lever is locked by inside thumbturn
- Operating inside lever, closing door or operating outside emergency release coin turn unlocks outside lever
- When outside lever is locked, fan indicator message is displayed outside/inside
- Inside lever is always free for immediate egress



Classroom with Indicator MC7070 (ANSI: F05)

- Latchbolt operated by lever from either side, except when outside lever is locked from outside by key
- When outside lever is locked, latchbolt is retracted by key or by operating key and outside lever from outside or by operating inside lever
- Auxiliary latch deadlocks latchbolt when door is closed
- When outside lever is locked, fan indicator message is displayed outside/inside
- Inside lever is always free for immediate egress



Entrance with Indicator MC7438 (ANSI: F04)

- Latchbolt operated by lever from either side
- Deadbolt operated by key outside or thumbturn inside
- Key outside operates both bolts
- Operating inside lever retract bolts; outside remains unlocked
- Auxiliary deadlocks latchbolt when door is closed
- When outside lever is locked, fan indicator message is displayed outside/inside
- Inside lever is always free for immediate egress




Office/Inner Entry with Indicator MC7050 (ANSI: F04)


- Latchbolt operated by lever unless outside lever is locked by key or thumbturn inside
- When outside lever is locked, latchbolt can be retracted by key outside or inside lever
- No deadbolt; auxiliary latch deadlocks latchbolt
- When outside lever is locked, fan indicator message is displayed outside/inside
- Inside lever is always free for immediate egress



MORTISE LOCKCASE

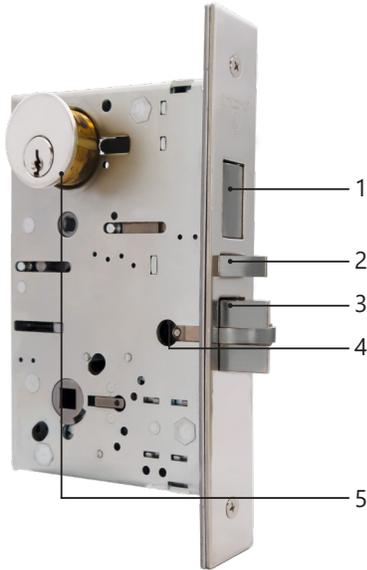

1. 1" throw, heavy duty stainless steel deadbolt
2. Auxiliary latch deadlocks latch bolt when door is closed, providing extra security
3. Guarded, two-piece stainless steel 3/4" latch bolt projection with mechanical anti-friction tongue
4. Field reversible: latch direction can be easily reversed without opening lock case
5. 6-pin solid brass mortise cylinder

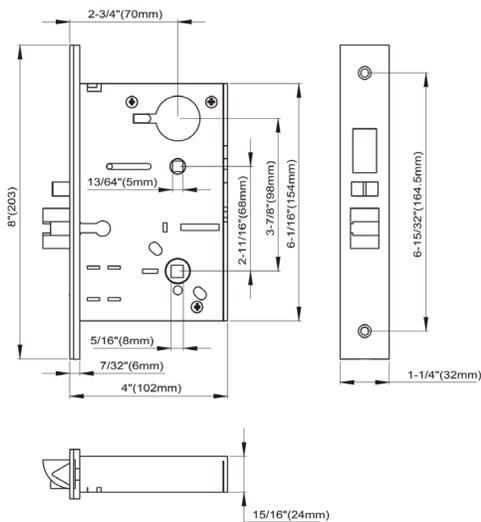

SPECIFICATIONS

Door Thickness	1-3/4" (45mm) standard Thick Door Kits available
Backset	2-3/4" (70mm)
Handing	Specify handing for all functions
Lockcase	Field reversible without disassembly
Lever Spindle	8mm x 8mm square
Thumbturn Spindle	5mm x 5mm square
Center to Center	Lever to Cylinder: 3-7/8" (98mm) Lever to Thumbturn: 2-11/16" (68mm)
Case Size	4" x 6-1/16" x 15/16" (102mm x 154mm x 24mm)
Deadbolt	1" (25mm) throw in stainless steel
Latchbolt	3/4" (19mm) anti-friction throw Schlage C keyway 6 pin mortise cylinder with 2 keys standard. Optional keyways, keying services, and IC cores available
Cylinder	
Lockcase	Heavy gauge plated steel
Strike	ANSI stainless steel strike, 4-7/8" x 1-1/4" curved, field reversible
UL	UL listed for 3-hour fire door

HOW TO ORDER A MORTISE LOCK

HOW TO ORDER LOCKSETS

Use the sequence below to order mortise locksets specification. Please see price book for parts or additional service upcharge.

Rose	Lever	Lock	Function	Indicator	Finish	Handing
SF 1	243 2	-MC70 3	50 4	-SW 5	32D 6	LH 7
ROSE	LEVER	LOCK		FUNCTION		
 SF	 101  106  211  223  244  318  346  102  107  213  225  251  319  351  103  108  214  226  276  320  380  104  109  217  227  300  344  105  210  221  243  311  345	70 No Deadbolt 74 With Deadbolt	96 Privacy with Coin Turn and Indicator 50 Inner Entry 38 Entry w/o Toggle 70 Classroom			

5 INDICATOR

SW = Single Window
 DW = Dual Window

6 FINISH

Standard:



7 HANDING

RH = Right Hand LH = Left Hand RHR = Right Hand Reverse LHR = Left Hand Reverse