

WS-90 Wall Strike For Sliding Doors



HIGHLIGHTS

- Designed as an effective, aesthetic solution to enable sliding and barn doors to surface latch.
- Unique installation design ensures maximum strength and security via an interlocking mounting.
- Concealed fixing with no visible set screws prevents hardware tampering.
- Stainless Steel for maximum durability and high tolerance against heat and fire

SPECIFICATIONS

Standard Door Thickness	1-3/4" (45mm)
Strike Case Size	2-7/16" x 1-3/4" x 1-9/16" (61mm x 45mm x 40mm)
Strike Opening Size	1-3/8" x 5/8" (35mm x 16mm)
Handing	Non-handed


APPLICATION

Surface-mounted strike that enables sliding and barn doors to latch or lock. WS-90 is the only modern-design surface-mounted Wall Strike that works with sliding and barn doors.

Suitable for use with the INOX PD5000, PD8000, or PD95. WS-90 can be used in a wide range of applications, including but not limited to:

- Hospitality
- Multifamily & Mixed Use
- Commercial & Industrial
- Office Buildings

STRIKE DIMENSIONS

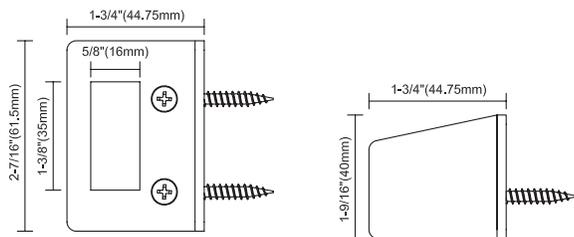

FINISH

Standard:

- 32D Satin Stainless Steel
- 19G Graphite Black

Special Order:

- CeraMax Ceramic Coating
 - C19G Ceramic Graphite Black
 - C19 Ceramic Flat Black
 - CGY Ceramic Stormy Grey
 - CDB Ceramic Dark Bronze

MATERIAL

- 304 Stainless Steel