



PD95 Series

SLIDING DOOR LOCK

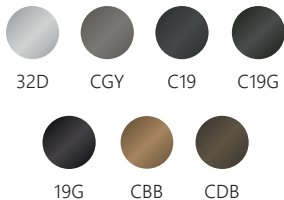
Perfect sliding door solution across a variety of applications, including commercial, mixed use, multi-tenant offices, and commercial/retail facilities.



CODE COMPLIANCE

- ANSI/BHMA 156.36 Auxiliary Locks
- ANSI A117.1 Accessibility Code (ADA Compliant)

FINISHES




FEATURES

- Single-action egress for fast, safe exit in emergencies
- Patented anti-binding winged deadbolt ensures smooth and secure operation
- 3D adjustable strike for easy door and frame alignment
- Heavy-duty self-retracting bolt with non-marring hooks for lasting performance
- ADA-compliant trim for accessible, user-friendly operation
- Durable stainless steel construction built for commercial and high-traffic environment


SPECIFICATIONS

Door Thickness	1-3/4" (45mm) Standard 1-3/8" (35mm) Thin Door Kit 2" to 2-1/4" (50mm to 57mm) Thick Door Kit available
Backset	2-3/4" (70mm) & 2-1/2" (63.5mm)
Lever Spindle	8 x 8mm square
Thumbturn Spindle	5 x 5mm square
Center-to-Center Distance	Lever to Cylinder: 3-7/8" (98mm) Lever to Thumbturn: 2-11/16" (68mm)
Cylinder	Schlage C keyway 6 pin 1-1/4" mortise cylinder w/ 2 keys (standard) Optional SFIC and LFIC housing and cores available
CAM	CAM01-SCL Clover Cam
Material	Trim: Stainless Steel Lockcase: Heavy gauge Steel Deadbolt: Stainless Steel Cylinder: Solid Brass Faceplate/Strike: Stainless Steel


FUNCTIONS

**PRIVACY 40**


- Deadbolt can be retracted by inside lever or outside emergency coin release
- Thumbturn inside locks and unlocks deadbolt
- Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress

**CLASSROOM 70**


- Deadbolt can be locked or unlocked by outside key
- No thumbturn on inside
- Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress

**ENTRY / OFFICE 50**

- Deadbolt can be retracted or engaged by inside thumbturn or outside key
- Outside lever is rigid at all times
- Inside lever can always retract deadbolt for emergency egress

**SECURITY COMMUNICATING 95**

- Deadbolt can be retracted by inside key only
- Inside lever is rigid at all times
- No thumbturn on either side of door
- Blank rosette on outside

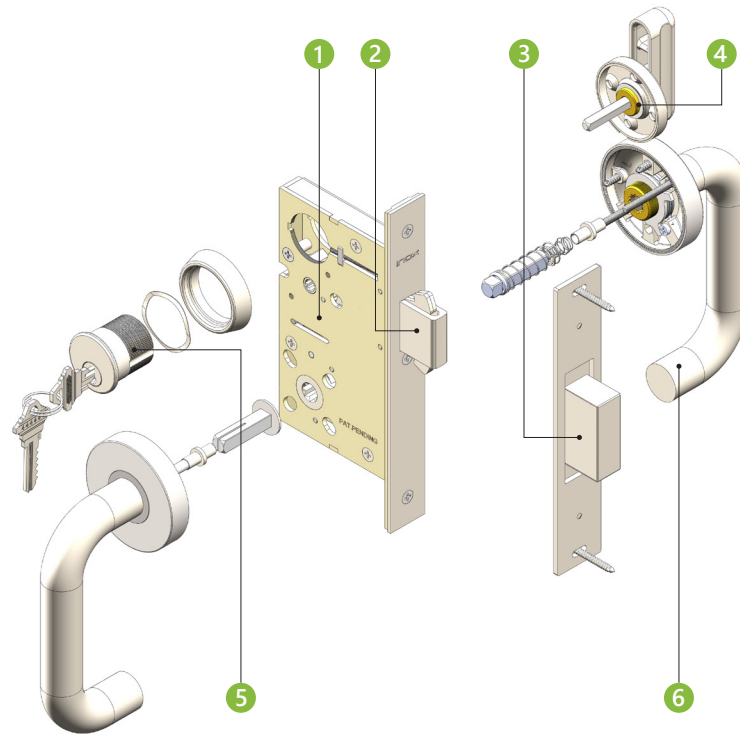
**PATIO / EXIT 60**

- Thumbturn inside locks or unlocks deadbolt
- Outside lever is rigid at all times
- No keyed cylinder outside; door cannot be opened from outside when locked
- Inside lever can always retract deadbolt for emergency egress

FUNCTION TABLES

	Privacy	Inner Office	Patio/Exit	Classroom	Storeroom	Security Communicating
Item Code	40	50	60	70	80	95
Inside Lever	✓	✓	✓	✓	✓	✓
Outside Lever	✓	✓	✓	✓	✓	X
Lockcase	✓	✓	✓	✓	✓	✓
Cylinder	X	✓	X	✓	✓	✓
Coin Turn	✓	X	X	X	X	X
Thumbturn	✓	✓	✓	X	X	X

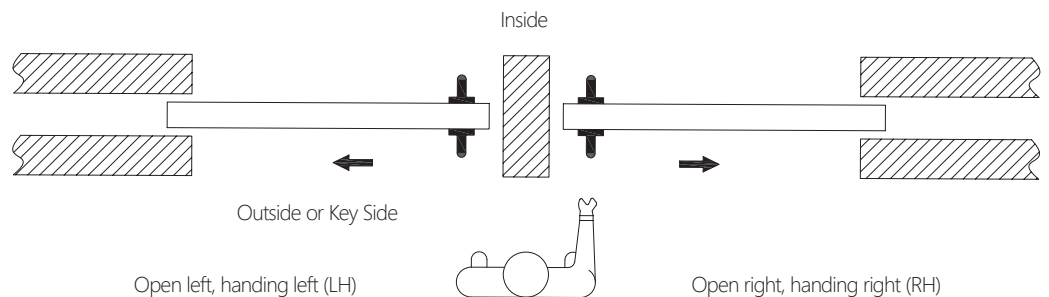
COMPONENTS



- | | |
|--|---|
| <p>1 PD95 lockcase and faceplate
 PD95-234 2-3/4" backset or
 PD95-212 2-1/2" backset</p> <p>2 1" (25.4mm) heavy-duty brass bolt throw with self-retracting non-marring hooks</p> <p>3 3D adjustable strike for deadbolt</p> <ul style="list-style-type: none"> • Up and down adjustment is $\pm 1/4"$ • Left and right adjustment is $\pm 1/8"$ • Front and back adjustment is by adding $\pm 3/64"$ spacers | <p>4 ADA Compliant thumbturn</p> <p>5 Schlage C keyway, 6 pin 1-1/4" mortise cylinder</p> <p>6 Heavy-duty stainless steel cast rose with choice of X Series lever design</p> |
|--|---|

HANDING

- Handing refers to the direction the door slides open. Example: If the door slides to the left to open, it is a left-handed door.
- Determine door direction from the exterior or key side of the door when facing into the room.



HOW TO ORDER MORTISE LOCKS FOR SLIDING DOORS

HOW TO ORDER STANDARD LOCKSETS

To order locksets with a non-standard specification, please describe the additional requirements in the same sequence as below.
Please see price book for parts or additional service upcharge.

ROSE	LEVER	LOCK	FUNCTION	BACKSET	CYLINDER	THUMBTURN	INDICATOR	FINISH	HANDING
XRA	201	-PD95	50	A		-GR07		-32D	-LH
1	2	3	4	5	6	7	8	9	10
ROSE	LEVER	LOCK	FUNCTION	BACKSET					
									
XRA	201	202	205	221	243				
<i>*XGT available upon request.</i>									
	244	276	318	319	320				
									
	321	345	346	509					
				5 BACKSET					
				Backset Blank = 2-3/4"					
				Backset A = 2-1/2"					
					6 CYLINDER AND HOUSING (INCLUDES COLLAR)				

6 CYLINDER AND HOUSING (INCLUDES COLLAR)

- LC = Less Cylinder
- Blank = Standard Mortise 1-1/4" Cylinder
- S6 = Small Format Interchangeable Cylinder (SFIC) Housing 1-1/4", 6-Pin, Less Core, L Clover Cam
- S7 = Small Format Interchangeable Cylinder (SFIC) Housing 1-3/8", 7-Pin, Less Core, L Clover Cam
- L6 = Large Format Interchangeable Cylinder (LFIC) Housing 1-1/2", 6-Pin, Less Core, L Clover Cam
- Order IC Cores and Thick Door Kits (TDKs) separately. (See Price Book)

7 THUMBTURN

46MM DIAMETER



53MM DIAMETER



8 FINISHES* (STANDARD)

- 32D Satin Stainless Steel
- 19G Graphite Black
- CeraMax Graphite Black (C19G)
- CeraMax Flat Black (C19)
- CeraMax Stormy Grey (CGY)
- CeraMax Dark Bronze (CDB)
- CeraMax Burnt Bronze (CBB)

*Please see Finish Solutions on INOX website for special order finishes.

9 HANDING

- RH = Right Hand
- LH = Left Hand