

HIGHLIGHTS

- Stainless Steel construction for strength and longevity
- Field reversible 28 degree latch
- Designer lever and Finish options
- Standard Prep with RA and SE roses

TL3 Residential Tubular Latch For Swing Doors

SPECIFICATIONS

Latch Faceplate	1" x 2-1/4" square corner
Door Thickness	1-3/8"(35mm) to 1-3/4"(44mm) Thick door kits available
Backset	2-3/8" (60mm) 2-3/4" (70mm)
Lever Spindle	8 x 8mm square
Lever Action	28 degree
Handing	Latch is field reversible Specify for Half Passage or Passage with Privacy Bolt

COMPARISON CHART

	LT3	LT4	LT7
Grade 2 Latch		✓	
Grade 3 Latch	✓		
Magnetic Latch			✓
28 Degree Retraction	✓	✓	✓
Available in 2-3/4"	✓	✓	✓
Available in 2-3/8"	✓	✓	✓
Number of Designs	3	35	35

APPLICATION

TL3 latches are economical yet suitable for a wide range of applications.

CODE COMPLIANCE




- ANSI/BHMA A156.3 Grade 3
- UBC Standard 7-2 (1997) NFPA 252
- NFPA 80 National Fire Protection-Fire Door Assembly
- NFPA 101 National Fire Protection-Life Safety
- ANSI/BHMA A156.18 Finishes
- ANSI A117.1 ADA Accessibility for lever sets


HOW TO ORDER

Specify the Rose, Lever Design, Function, Backset, Finish and Handing using the product identification below:

Standard Product Identifications

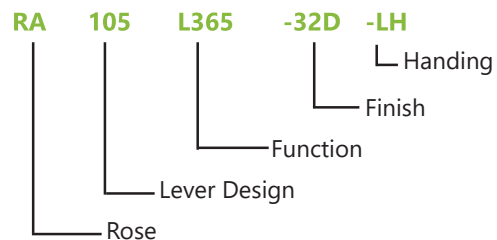


FUNCTION



Passage

- Both levers are always unlocked



Privacy

- Push the privacy pin from inside to lock door
- Unlock by turning inside lever or using emergency release pinhole located on outside rose or plate cover




Half Passage

- Outside lever always unlocked; inside, dummy rose only
- Door cannot be opened from inside

CHANGE LATCH BOLT DIRECTION

- Determine door handing for latch; for privacy latches, handing can be determined by the privacy pin. The threaded hole should always face inside.

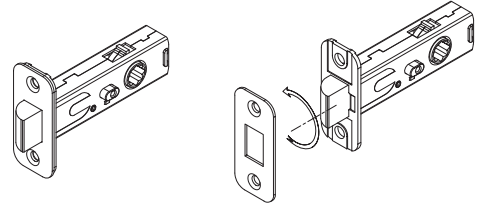

- Ensure faceplate is removed, latch can rotate 180 degrees to swap handing.
- Once latch is handed correctly, attach the faceplate before installing in door.


MATERIAL

Stainless Steel Face and Strike


FUNCTION TABLE

	Passage	Privacy	Half Passage
2-3/4" backset code	L371	L372	L375
2-3/8" backset code	L361	L362	L365
Latch	×	×	×
Levers	×	×	×


DOOR PREPARATION



Standard RA/SE/SH Prep




Special GT/GS Prep




Strike Prep

COMPONENTS

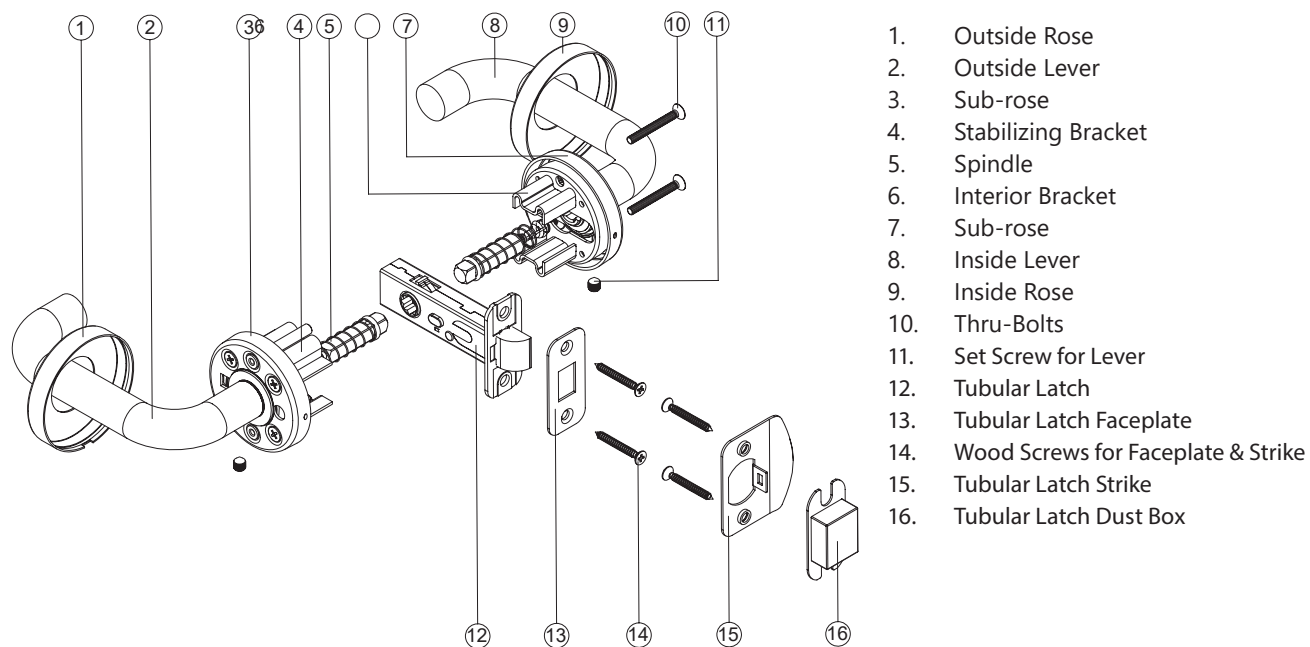


STRIKES


TL3 latches are only available with the LSR-D14. Full-lip Strike, T-Strike and ASA Strike can be ordered separately.




Full-lip Strike
 LSR-D1
 1-3/4"x2-1/4"



Full-lip Strike 1/4" Corner
 LSR-D14
 1-3/4"x2-1/4"



T-Strike
 LSR-T1
 1-1/8" x 2-3/4"



ASA Strike (ANSI Standard)
 LSR-ADA
 1-1/4"x4-7/8"

ROSES



RA Rose







SE Rose

TL3 TUBULAR LATCH

HOW TO ORDER

To order locksets, please describe the additional requirements in the same sequence as below. Parts or service upcharges may apply.

Rose	Lever	Function	Finish	Handing
SE 1	318 2	L375 3	-32D 4	-LH 5
ROSE	LEVER	FUNCTION		
  RA SE	 101  102  103  104  105  106  107  108  109  210  211  213  214  217  221  223  225  226  227  243  244  251  276  300  311  318  319  320  321  344  345  346  351  380	<u>Tubular Latch</u> L361 Passage, 2-3/8" Backset, TL3 Latch L362 Privacy, 2-3/8" Backset, TL3 Latch L365 Half Passage, 2-3/8" Backset, TL3 Latch L371 Passage, 2-3/4" Backset, TL3 Latch L372 Privacy, 2-3/4" Backset, TL3 Latch L375 Half Passage, 2-3/4" Backset, TL3 Latch DL Dummy Single Left DR Dummy Single Right 380 <i>only available in RA/SE</i>		

4 FINISH



32D Satin Stainless Steel



19G Graphite Black



Split Finish (SP)

5 HANDING

-RH = Right Hand

-LH = Left Hand

-RHR = Right Hand Reverse

-LHR = Left Hand Reverse