



TL4 Interior Tubular Latch For Swing Doors


HIGHLIGHTS

- Latch sets consist of beautifully designed trim made of stainless steel or forged brass, a spring-assisted interlocking chassis, and a commercial grade tubular latch for high-end residential, mixed use, and hotel or other hospitality openings
- Stainless steel latch stabilizer bracket designed to handle heavy torque on the 28 degree latch retraction
- Applicable with all INOX decorative levers, knob, and escutcheon designs with no special modification

SPECIFICATIONS

Latch Faceplate	1" x 2-1/4" square corner
Door Thickness	1-3/8"(35mm) to 1-3/4"(44mm) Thick door kits available
Backset	2-3/8" (60mm) 2-3/4" (70mm)
Lever Spindle	8 x 8mm square
Lever Action	28 degree
Handing	Latch is field reversible Specify for Half Passage or Passage with Privacy Bolt

DOOR PREPARATION

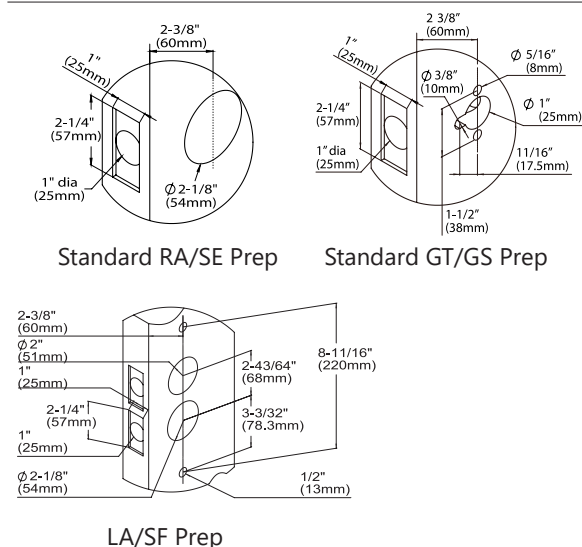

APPLICATION

TL4 Tubular latches are suitable for a wide range of applications, including but not limited to: Hospitality, Mixed-use and high-end Residential.

CODE COMPLIANCE




- ANSI/BHMA A156.3 Grade 2
- Fire-rated latch tested for UL10B / UL10C to 3 hours
- UBC Standard 7-2 (1997) NFPA 252
- NFPA 80 National Fire Protection-Fire Door Assembly
- NFPA 101 National Fire Protection-Life Safety
- ANSI/BHMA A156.18 Finishes
- ANSI A117.1 ADA Accessibility for lever sets

HOW TO ORDER

Specify the Rose, Lever Design, Function, Backset, Finish and Handing using the product identification below:


Standard Product Identifications

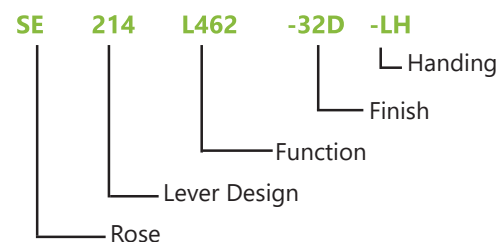

To specify "Fire Rated" version of Tubular Latch, add the letter "F" immediately following the function. Example: SE214L462F-32D-LH


TL4 TUBULAR LATCH

FUNCTION




Passage

- Both levers are always unlocked



Privacy


- Push the privacy pin from inside to lock door
- Unlock by turning inside lever or using emergency release pinhole located on outside rose or plate cover




Half Passage

- Outside lever always unlocked; inside, dummy rose only
- Door cannot be opened from inside


CHANGE LATCH BOLT DIRECTION



- Determine door handing for latch
- Remove INSIDE washer (privacy pin side)
- Rotate latch direction 180° with faceplate together
- Install latch with faceplate to the latch body



Center Line




- Ensure that the center line on back of faceplate meets center seam of latch case
- Make sure the latch has the Arrow facing up

FUNCTION TABLE


	Passage	Privacy	Half Passage	Dummy
2-3/4" backset code	L471	L472	L475	PPD-RSL7
2-3/8" backset code	L461	L462	L465	PPD-RSL6
Latch	×	×	×	
Levers	×	×	×	×

STRIKES


All latches come with both T-Strike and Full-lip Strike with square corners. Full-lip Strike with Radius Corner and ASA Strike can be ordered separately.




Full-lip Strike
LSR-D1
1-3/4"x2-1/4"



Full-lip Strike 1/4" Corner
LSR-D14
1-3/4"x2-1/4"




T-Strike
LSR-T1
1-1/8" x 2-3/4"



ADA Strike (ANSI Standard)
LSR-ADA
1-1/4"x4-7/8"

COMPONENTS

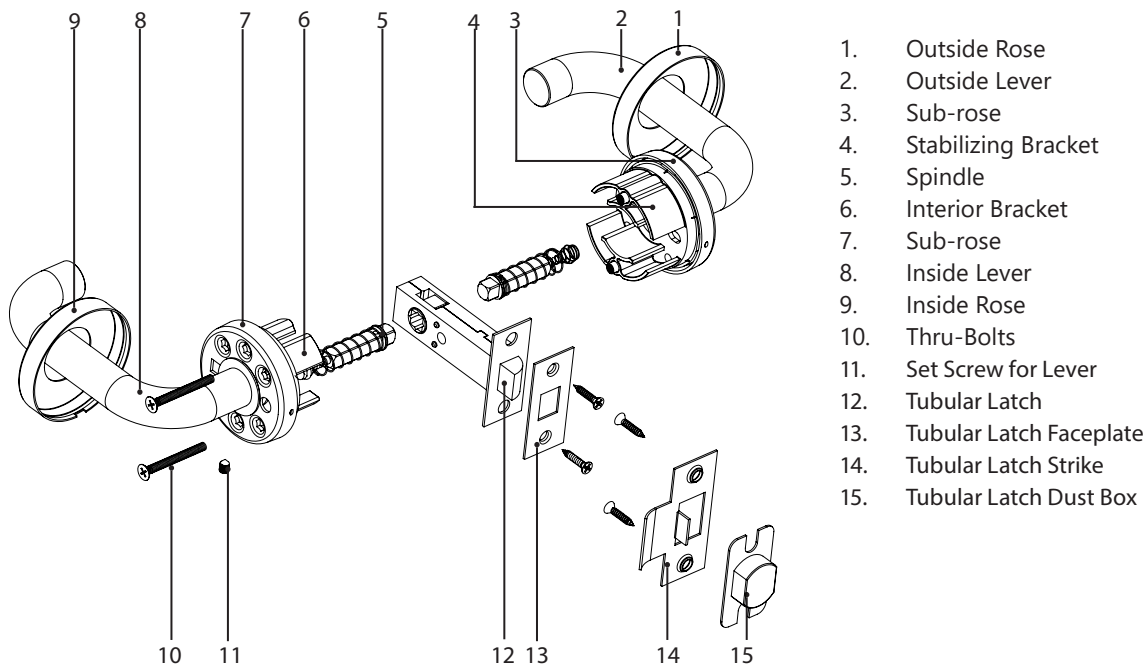

FINISH

- 32D Satin Stainless Steel
- 32 Bright Stainless Steel
- 19G Graphite Black
- PVD4 Satin Brass available in 105, 108, 221, 243, 244, 276, 318, 319, 320 and 345 lever designs
- PVD45 Modern Bronze available in 221, 243, 300, 319, 320 and 345 lever designs
- PVD52 Slate available in 221, 243, 300, 319, 320 and 345 lever designs
- PVD65 Black Pearl available in 221, 243, 300, 319, 320 and 345 lever designs
- CeraMax Ceramic Coating: C19G Graphite Black,
- C19 Flat Black, CGY Stormy Grey, CDB Dark Bronze
- Please see Finish Solutions on INOX website for special order finishes

ROSE AND ESCUTCHEONS



RA Rose



GT Rose



GA Rose



SE Rose



GS Rose



LA Plate



SF Plate





SH Plate

TL4 TUBULAR LATCH

HOW TO ORDER

To order locksets, please describe the additional requirements in the same sequence as below. Parts or service upcharges may apply.

Rose	Lever	Function	Fire Rated	Finish	Handing
SH	318	L475	F	-32D	-LH
1	2	3	4	5	6
ROSE	LEVER	FUNCTION			
 RA					
 SE					
 GT					
 GS					
 GA					
 SH					
					
					
					
					DL Dummy Single Left DR Dummy Single Right L761 Passage, 2-3/8" Backset, TL7 Latch L762 Privacy, 2-3/8" Backset, TL7 Latch L765 Half Passage, 2-3/8" Backset, TL7 Latch L771 Passage, 2-3/4" Backset, TL7 Latch L772 Privacy, 2-3/4" Backset, TL7 Latch L775 Half Passage, 2-3/4" Backset, TL7 Latch 379 only available in GA/GT/GS/SH 380 only available in RA/SE/SH

4 FIRE RATED

For complete sets using TL4 Fire-rated latches, please add "F" behind function code (e.g. SH318L475**F**-32D)

5 FINISH

 32D Satin Stainless Steel	 Ceramax Flat Black (C19)	 Split Finish (SP)	 Slate (PVD52)
 32 Bright Stainless Steel	 Ceramax Stormy Grey (CGY)	 Satin Brass (PVD4)	 Black Pearl (PVD65)
 19G Graphite Black	 Ceramax Dark Bronze (CDB)	 Modern Bronze (PVD45)	
 Ceramax Graphite Black (C19G)	 Ceramax Burnt Bronze (CBB)		

PVD4 is available for 105, 108, 221, 243, 244, 276, 318, 319, 320 and 345 lever designs.

PVD45 is available for 221, 243, 300, 319, 320 and 345 lever designs.

PVD52 is available for 221, 243, 300, 319, 320 and 345 lever designs.

PVD65 is available for 221, 243, 300, 319, 320 and 345 lever designs.

6 HANDING

-RH = Right Hand

-LH = Left Hand

-RHR = Right Hand Reverse

-LHR = Left Hand Reverse